


Stallkamp

OPERATING MANUAL

Submersible motor pump TMP Type 3 M1801

BG 132 4.0/ 5.5/ 7.5 kW
BG 160 11.0/ 17.0/ 22.0 kW

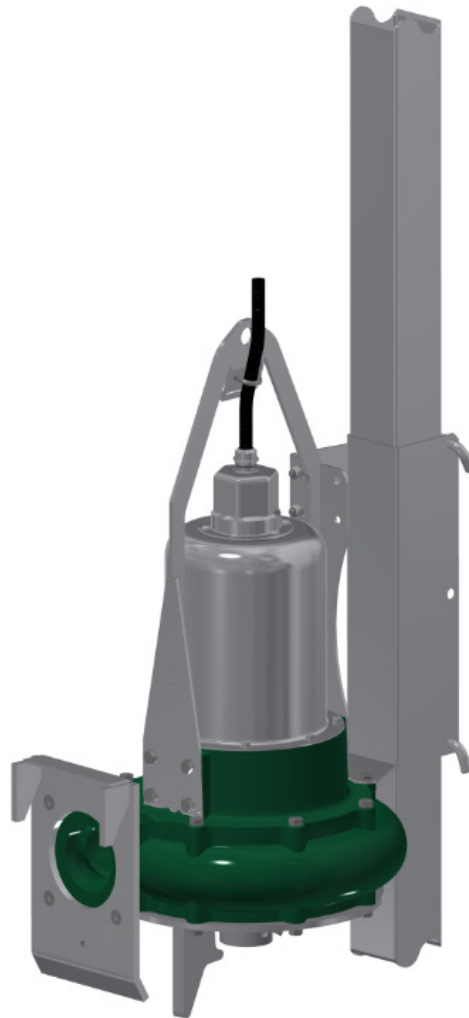

Document no.: 8110292 Version: January 2018

© The entire written text including all photos is protected by copyright.
Every use without the consent of the author outside of the narrow limits of the copyright law is inadmissible and punishable.
This especially applies to duplications, translations, microfilming and the storage and processing in electronic systems.

Space for notes:

[illegible]

General notices

- **The technical specifications, weights and measures are to be considered approximate and not binding.**
- **Pictures are for illustration purposes and can deviate from the actual product.**

Date saved: 05/08/2019 13:29:00
Date printed 06/08/2019
BA_TMP Typ3 M1801_englischV1_8110292oE_EN(UK).DOC

is list including its parts is protected by copyright. Every use without the consent of the author outside of the narrow limits of the copyright is inadmissible and punishable. This especially applies to duplications, translations, microfilming as well as the storage and processing in electronic systems.

© Erich Stallkamp ESTA GmbH – In der Bahler Heide 4 – Industriegebiet West – 49413 Dinklage,
Germany Tel. +49 (0)4443 / 9666-0 – Fax +49 (0)4443 / 9666-60 info@stallkamp.de –
www.stallkamp.de

1 TABLE OF CONTENTS

1	TABLE OF CONTENTS	3
2	DECLARATION OF CONFORMITY PURSUANT TO MACHINERY DIRECTIVE 2006/42/EC (ORIGINAL, GERMAN VERSION)	5
3	GENERAL INFORMATION	6
3.1	Designation of notices in the operating manual.....	6
3.2	Unauthorised conversion and spare part manufacture	6
4	SAFETY.....	7
4.1	Qualification of the personnel	7
4.2	Dangers if the safety instructions are not observed	7
4.3	Safety-conscious work.....	8
4.4	Safety instructions for maintenance, inspection and installation work	8
5	GUARANTEE.....	8
5.1	General	8
5.2	Exclusion of liability	9
6	PRODUCT DESCRIPTION OF TMP TYPE 3 M1801	10
6.1	General description	10
6.2	Intended use	10
6.3	Technical data	11
6.4	Type plate for TMP Type 3 M1801	11
7	PERFORMANCE DATA AND DIMENSIONS FOR TMP TYPE 3 M1801	12
8	CONSTRUCTION TYPE FOR TMP TYPE 3 M1801	13
8.1	Cable connection	13
8.2	Motor	13
8.3	Monitoring device	13
8.4	Oil chamber.....	13
8.5	Pump impeller	13
9	TRANSPORT AND STORAGE REGULATIONS FOR TMP TYPE 3 M1801.....	13
10	INSTALLATION OF TMP TYPE 3 M1801.....	14
10.1	Prior to commissioning: safety instructions	14
10.2	Commissioning	14
10.3	Leakage indicator – special equipment	15
10.4	Securing the electrical cable	15
10.5	Cleaning the device.....	15
10.6	Connection plan TMP Type 3 M1801	16
11	ELECTRICAL CONNECTION OF TMP TYPE 3 M1801.....	17
11.1	Electrical connection and protection of the electrical motor.....	17
11.2	Direction test.....	17
12	MAINTENANCE OF TMP TYPE 3 M1801.....	18

12.1	Maintenance intervals	18
12.1.1	Recommendation: every 3 months	18
12.1.2	Recommendation: every 6 months in continuous operation.....	18
12.1.3	Recommendation: every 6 months	18
12.1.4	Recommendation: every 12 months.....	19
12.2	Replacing the shaft seal on the TMP Type 3 M1801 BG 132/160.....	20
12.3	Changing the pump impeller on TMP Type 3 M1801	20
13	NOTICES.....	21
13.1	Regulation of the professional association	21
14	SPARE PARTS LIST FOR TMP TYPE 3 M1801 BG 132.....	22
14.1	Assembly drawing, TMP Type 3 M1801 BG 132, Drg.28-0300	22
15	SPARE PARTS LIST FOR TMP TYPE 3 M1801 BG 160.....	23
15.1	Assembly drawing, TMP Type 3 M1801 BG 160, Drg.28-0200	23
16	MAINTENANCE AND REVISION LIST	24

2 DECLARATION OF CONFORMITY PURSUANT TO MACHINERY DIRECTIVE 2006/42/EC (ORIGINAL, GERMAN VERSION)

Manufacturer: Erich Stallkamp ESTA GmbH
In der Bahler Heide 449413 Dinklage Germany
Tel.: (0049) 04443 / 9666-0
Fax.: (0049) 04443 / 9666-60

Authorised representative for the composition of the technical documentation:

Dipl.-Ing. (FH) Heiko Ansorge
In der Bahler Heide 449413 Dinklage Germany

Product name: Submersible motor pump TMP Type 3 M1801

Type: TMP 4.0 kW; 5.5 kW; 7.5 kW; 11 kW; 17 kW; 22 kW

We hereby declare that the products listed above conform to the pertinent regulations of the EC Directive:

Machinery Directive 2006/42/EC

Including all amendments and compliant with the pertinent regulations of the directive on electromagnetic compatibility:

EMC Directive 2014/30/EU

The following harmonised standards have been applied:

EN ISO 12100: 2010, Safety of machinery – General principles for design

EN 809:2002-06-01, Pumps and pump units for liquids – Common safety requirements

EN 60204-1:2007-06, Safety of machinery – Electrical equipment of machines – Part 1: General requirements

EN 61000-6-1:2016-05, Electromagnetic compatibility (EMC) Part 6-1: Generic standards – Immunity for commercial environments

EN 61000-6-2:2006-03, Electromagnetic compatibility (EMC) Part 6-2: Generic standards – Immunity for industrial environments

Dinklage, dated 6. August 2019

Stallkamp
Erich Stallkamp ESTA GmbH
D-49413 Dinklage-Germany
In der Bahler Heide 4, Industriegeb. West

Erich Stallkamp ESTA-GmbH, Dipl.-Ing. (FH) H. Ansorge (AL-TPR, Authorised representative for GL)

This declaration is not an assurance of characteristics in the sense of the German law on product liability. The safety instructions provided in the product documentation must be observed. If any conversions or modifications are made to the product, this declaration shall lose its validity with immediate effect.

3 GENERAL INFORMATION

Our devices are developed according to the current state of technology, manufactured with great care and subject to a continual quality control. This operating manual should help you to get to know the device and to employ its proper operational possibilities.

The operating manual contains important notices in order to operate the device safely, appropriately and cost-effectively. It is necessary to observe the operating manual to ensure the reliability and long lifespan of the device and to avoid hazards.

The operating manual does not take local, on-site requirements into consideration; the operator is solely responsible for ensuring that these are observed, including by external installers.

3.1 Designation of notices in the operating manual



In the operating manual, safety instructions warning of dangers to persons are identified with the general hazard symbol according to DIN 4844-W9.



In the operating manual, warnings about electrical voltage are identified with the safety signs according to DIN 4844-W8.

All other notices which might restrict the functional reliability of the device or represent a danger for the machine if not observed are marked with the word:

ATTENTION!

This machine unit may not be operated beyond the values defined in the technical documentation with respect to pumped liquid, delivery flow rate, rotational speed, density, pressure, temperature as well as motor power or other instructions contained in the operating manual or contract documentation. If you have any queries, please consult the manufacturer.

The rating plate displays the most important operating data and the machine serial number. We request that this always be specified in the event of enquiries, subsequent orders and when ordering spare parts.

Provided that additional information or notices are required or in case of damage, please contact our local field sales employee or contact us directly.

3.2 Unauthorised conversion and spare part manufacture

Conversions and modifications to the devices and their machine units are only permissible with the explicit approval of the manufacturer. The use of non-"genuine spare parts" abrogates all liability.

4 SAFETY

This operating manual contains fundamental notices which must be observed during installation and operation as well as when performing maintenance work on the device.

It is therefore absolutely necessary that the installer as well as the responsible specialist personnel and operator read these instructions before installation and commissioning, and that they are continually available at the location where the machine is operated.

Not only the safety instructions in this operating manual must be observed, but also the warning signs and regulations of the respective professional association in the latest version.

4.1 Qualification of the personnel



The personnel performing the operation, maintenance, inspection and installation must be appropriately qualified for this work.

Area of responsibility, competence and the monitoring of the personnel must be precisely regulated by the operator. If the necessary skills are not available to the personnel, then they should be appropriately trained and instructed.

Furthermore, the operator must ensure that the personnel fully understands the contents of the operating manual.

4.2 Dangers if the safety instructions are not observed

Failure to observe the safety instructions can endanger persons as well as the environment and the machine. Failure to observe the safety instructions results in the loss of all claims for damages.

Specifically, failure to observe instructions can, for example, result in the following dangers:

- Failure of important functions of the device or system.
- Endangerment of persons due to electrical, mechanical, chemical or other exposure.
- Endangerment of the environment due to leakage of hazardous materials.

WARNING SIGNS

Observe all notice and warning signs. Dangerous gases can escape when stirring the manure.



DANGER OF POISONING!

If the manure is stored below slatted floors, the presence of persons in buildings during agitation is only permissible with sufficient ventilation. Therefore, windows and doors must be open and the ventilator set to full power.

4.3 Safety-conscious work

Observe all safety instructions presented in this operating manual, the existing national regulations for accident prevention as well as possible internal work, operation and safety regulations of the company at all times.

Safety instructions for the operator and attendant:

- ✓ If hot or cold machine parts can pose a hazard, then these parts must be protected on site against contact.
- ✓ Contact protection for moving parts may not be removed while the machine is in operation.
- ✓ Any leakage of dangerous materials must be conducted away so that there is no endangerment to persons and environment. Observe statutory provisions.

4.4 Safety instructions for maintenance, inspection and installation work



The operator has to ensure that all maintenance, inspection and installation work is carried out by authorised and qualified specialist personnel.

Fundamentally, all work on the machine can only be carried out when the machine is at a standstill.

Directly after completion of the work, all safety and protection equipment must be reattached or made functional.

5 GUARANTEE

This section contains the general particulars for the guarantee. Contractual agreements are always treated with priority and are hereby not rescinded. The period of guarantee is a component of Stallkamp's general terms and conditions. Agreements deviating from this must be specified in writing in the order confirmation.

5.1 General

Stallkamp is obligated to repair every defect to products sold by Stallkamp under the condition:

- ✓ that it is a quality defect of the material, manufacture or design;
- ✓ that the defect is reported in writing to Stallkamp or the Stallkamp representative within the period of the guarantee;
- ✓ that the product is employed exclusively in the specified operating conditions described in the operating manual and employed for the intended purpose;
- ✓ that the monitoring device integrated in the product is correctly connected (temperature protection);
- ✓ that genuine Stallkamp parts are used.

5.2 Exclusion of liability

No guarantee or liability is assumed for damage to the device if one or several of the following points are applicable:

- A faulty configuration of the device on our part because of inadequate or incorrect information from the ordering party or operator.
- Failure to observe the safety instructions, regulations or the necessary requirements in this operating manual which apply according to German law.
- Installation, disassembly or repair of the device not in keeping with the regulations.
- Inadequate maintenance.
- Possible chemical, electrical or electrochemical influences.
- Wear.

Since maintenance has an influence on the safety and functional capability of the device, it is an integral component of the guarantee. The operator of the device is obligated to have the manufacturer himself or a service approved by the manufacturer perform maintenance work according to the regulations of the manufacturer, including the necessary changing of oil and the repair and replacement of wearing parts. The operator is thus obligated to maintain a maintenance and revision list, which facilitates monitoring of the mandatory inspection and maintenance work (see Point 16 Maintenance and revision list).

We expressly emphasise that this device is a fluid flow engine in which the protective coating is exposed to constant wear from the abrasive contents of the pumping medium and should consequently be classed as a wearing part. Wear, damage and secondary damages which result from external influences on the protective coating are expressly excluded from the guarantee. The use of the device and/or the field of application and reliability for the application must be verified by the operator and does not form part of the guarantee.

The liability of Stallkamp thereby excludes any liability for personal damages, material damages or financial losses.

The manufacturer reserves the right to modify the performance, specifications or configuration data without prior information.

6 PRODUCT DESCRIPTION OF TMP TYPE 3 M1801

6.1 General description

This operating manual applies to the standard model of the Stallkamp submersible motor pumps.

The pump may only be operated when completely submersed if used in explosive environments.

Submersible motor pump TMP Type 3 M1801 comprising:

- Stainless steel motor housing
- Oil filling in motor compartment with insulating oil
- Thermo-control with bimetallic switch per phase for overheating protection
- Cast iron pump housing coated with 2-component plastic lacquer
- Oil filling in oil chamber with hydraulic oil
- Pump impeller torque of 1450 rpm
- 10 m electric cable with special double-shell PU external sheath
- Stainless steel slide bearing including system to prove the capacitive level for guide rail 100 x 100 mm
- Maximum submersion depth 10 m
- Temperature of the pumping medium up to max. 50°C -> pumping without restrictions as long as motor is not running in overload range.
- Temperature of the pumping medium from 51°C to max. 70°C -> depending on the solid contents and the viscosity of the pumping medium, in isolated cases the cooling of the pump may not be sufficient. The motor is then switched off by the thermal protection switch. In this case, a pump impeller with a smaller exterior diameter is required.

6.2 Intended use

The pump is intended for the following applications:

- Pumping of liquid manure in final storage sites, reception pits and liquid manure canals;
- Pumping of bio-mass in biogas plants;
- Pumping of municipal sludge in treatment plants;
- Pumping of industrial waste water in industrial plants.

The pump has been designed with a wide variety of fields of application in mind in which a high flow rate is required proportional to the power consumption.

The flow rate (volume flow rate in m³/h) is dependent on the density and viscosity of the liquid, the type and the DM content of the liquid manure (animal feed), the support height and distance and the diameter of the pipeline.

6.3 Technical data

Submersible motor pump TMP Type 3 M1801 comprising:

- Pump type: TMP Type 3 M1801
- Three phase motor: 400V, 50Hz, 3Ph, 1450 rpm
- Protection category: IP68
- Insulating category: F = 155°C
- Motor power: 4.0; 5.5; 7.5; 11.0; 17.0 and 22.0 kW
- Pump seal: 4 radial shaft seal rings
- Slide bearing: V2A stainless steel, 1.4301 for guide rail 100 x 100 mm
- Impeller: Plated, coated steel

6.4 Type plate for TMP Type 3 M1801

The type plate illustrates the most important power and specification data:


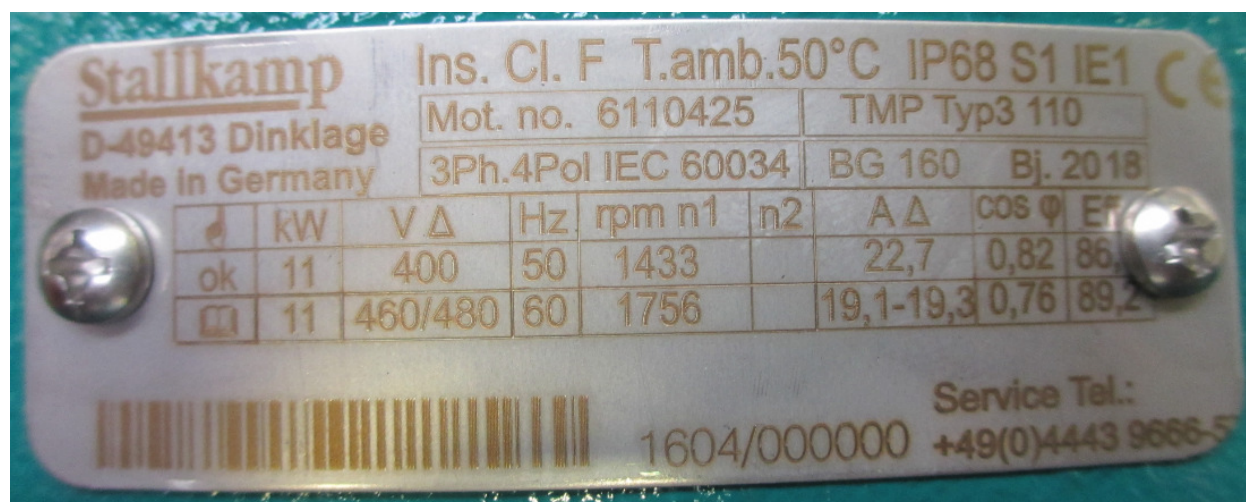


Fig. 1

- Motor number: (e.g. 6110425)
- Classification: (e.g. TMP Type 3 110)
- Performance data: (e.g. 11kW)
- Year of manufacture: (e.g. 2018)
- Stallkamp serial number: (e.g. 1604/000000)

In case of technical queries about the device, the above type plate data must be specified!

7 PERFORMANCE DATA AND DIMENSIONS FOR TMP TYPE 3 M1801

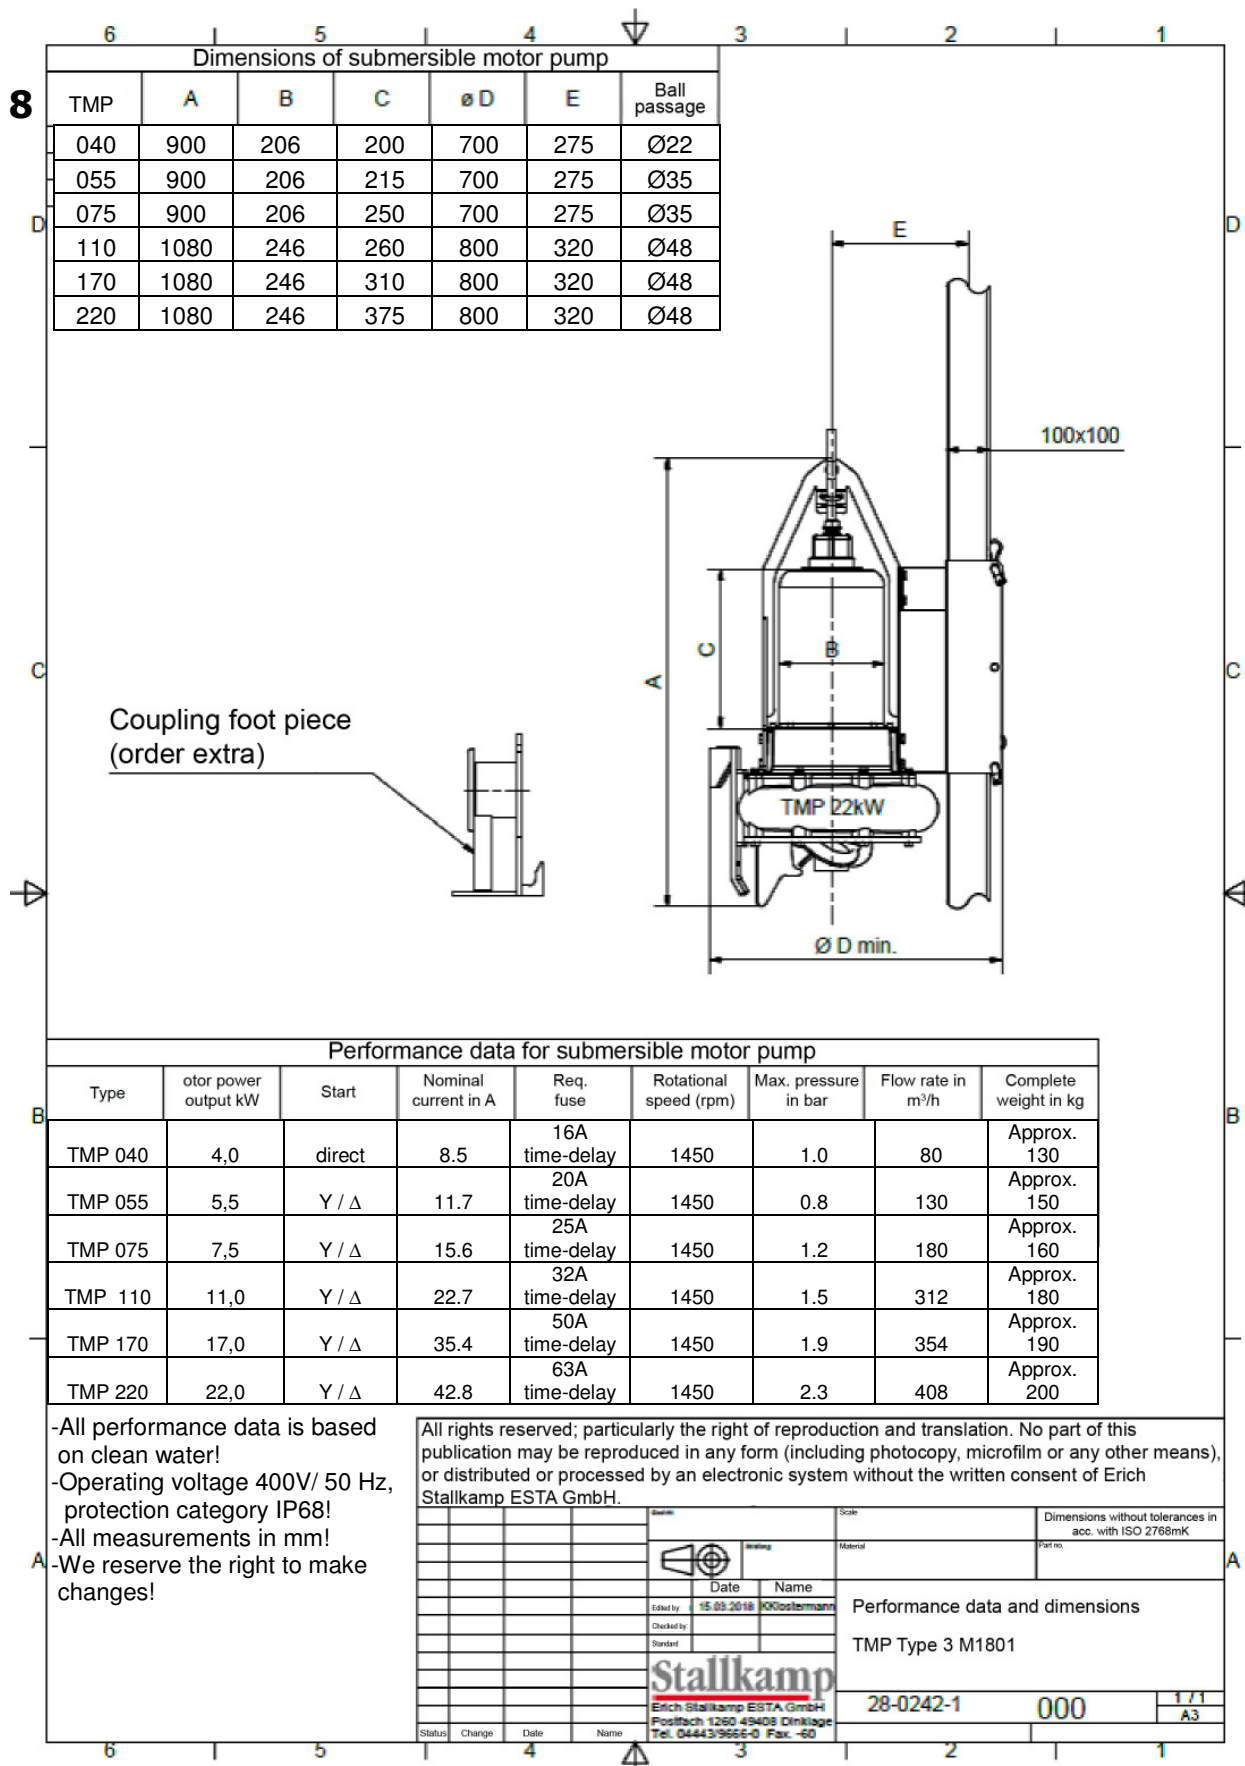

CONSTRUCTION TYPE FOR TMP TYPE 3 M1801

8.1 Cable connection

The cable connection compartment is completely sealed off from the surrounding liquid and towards the motor housing.

8.2 Motor

Three phase asynchronous motor as short circuit rotor at 50 Hz.

Continuous operation or intermittent operation with max. 6 evenly distributed activations per hour. The stator is insulated according to class F (155°C). The motor has been designed in such a way that in the case of nominal voltage deviations up to +/- 5% it can still attain an unchanged nominal output. With regard to the danger of overheating, +/- 10% deviations in the nominal voltage are allowed, provided that the motor is not running at full load the whole time. The difference between the individual phases must not exceed 2%.

8.3 Monitoring device

Three series-connected temperature sensors are installed in the stator winding. These will start reacting at 150°C.

ATTENTION! The thermal sensors must always be connected.

The device can be equipped with detectors: namely with a leakage detector for the detection of water in the oil.

8.4 Oil chamber

The device is equipped with an oil chamber between the motor and the pump impeller. This oil chamber contains an oil filling, which must be checked once annually.

8.5 Pump impeller

The devices are equipped with impellers made of tungsten carbide-plated steel. The size of the impeller depends on the construction size and the power consumption of the motors. In special cases when a pump is continuously running in the overload range, a smaller impeller is required.

9 TRANSPORT AND STORAGE REGULATIONS FOR TMP TYPE 3 M1801

The device must be transported in a lying position. Ensure that the machine is not unable to roll.

If the device is not used for a long period of time, it must be protected against moisture and heat. The impeller should be turned from time to time (approx. every two months) to ensure that the sealing surfaces do not adhere to each another. This is absolutely essential when the device is not in use.

The device must be inspected before commissioning following a long period of standstill. It is particularly important to verify that the cable entry points and seals are not damaged in any way.

The directions under point 4 "Safety" must be observed.

10 INSTALLATION OF TMP TYPE 3 M1801

10.1 Prior to commissioning: safety instructions

The following rules should fundamentally be observed to prevent accidents during maintenance and installation work:

- (1) Never work alone. The danger of drowning and suffocation must not be underestimated.
- (2) Check whether sufficient oxygen is available and that no poisonous gases exist.
- (3) Before welding work or using electrical tools, check whether there is a danger of explosion.
- (4) Pay attention to the danger of electrical accidents.
- (5) Examine lifting gear to ensure its fully satisfactory condition.
- (6) Ensure an adequate shutoff at the place of work, e.g., cordoning trellis.
- (7) Wear a hardhat, safety glasses and safety footwear.
- (8) Keep a first-aid kit ready.

Otherwise, observe the health and safety regulations as well as the prevailing governmental regulations.

10.2 Commissioning

- (1) The device can only be operated with a suitable bracket (see: lifting gear from the Stallkamp range). Lower the device completely into the liquid manure, making sure that the rope of the lifting gear is taut at all times and that the electric cable does not come into contact with the impeller.
- (2) Connect the pump's pressure connector up to the pressure line tightly so no pressure is lost.
- (3) Commission the device with the delta-wye motor protection switch. Attention: Turn through to "Delta"!

The impeller turns clockwise when viewed from the pump inlet (from below) (see 11.2 Impeller direction test).

- (4) As standard, the device is protected by:
 - a) an overload protection in the switch box
 - b) an overheating protection.

In case of an overload or of overheating, the device is switched off by a motor protection switch. If the device was switched off as a result of overheating, under no circumstances should you try to restart it by pressing the switch repeatedly.

A cooling phase of approx. half an hour must be maintained in order to avoid damage occurring to the motor winding. In some cases, it may be possible to restart the device after approx. 5 minutes, although the motor winding is still partly hot. Even in these cases, it is still important to maintain the cooling phase of approx. half an hour.

ATTENTION: The motor of the device must always remain fully immersed in the liquid to ensure that sufficient cooling is guaranteed at all times.

- (5) The secure positioning of all screws and connections must be verified.

10.3 Leakage indicator – special equipment

In the cases of leaks, i.e., if liquid manure or other foreign liquid enters the device, the control lamp on the switch box lights up. The unit switches off after approx. half an hour. If this is the case, lift the device out of the liquid and ascertain the reason for the disturbance.

10.4 Securing the electrical cable

The electric cable must be affixed to the rope with cable clips so that it is protected against damage from the impeller.

Important: When raising and lowering the device, always pay attention to the correct guidance of the electrical cable as it could otherwise be damaged by the impeller or the cable gland.

10.5 Cleaning the device

- (1) Pressure washers must not be used to clean the device.
- (2) The delta-wye motor protection switch must be fastened so that it is protected against moisture.

10.6 Connection plan TMP Type 3 M1801

		4	3	2	1
		<p>Ⓒ Depending on the model, black marking with no. or colour</p>			
C	Connection sequence to clamp ring	Cable designation on the supply cable		Connection description in motor	
	1	1	brown	Ⓒ	U1
	2	2	black	Ⓒ	V1
	3	3	grey	Ⓒ	W1
	4	4	green	Ⓒ	W2
	5	5	pink	Ⓒ	U2
6	6	white	Ⓒ	V2	
		<p>Wire 2.5mm² / 4.0mm²</p>			
				<p>PE protective ground wire (green/yellow)</p>	
				<p>Ⓐ Attention, only applies to: Ⓐ</p>	
E	7	1	<p>Wire 0.75mm² (blue)</p>	Thermal sensor with thermistor PTC 150°C (electronic evaluation system req.)	
	8	2		Ⓐ	
A	9	3	<p>Wire 0.75mm² shielded (red)</p>	Leakage display sensor if available (electronic evaluation system req.)	
	10	4		Ⓐ	
				<p>Ⓐ</p>	
Ⓐ	9	3	<p>Wire 0.75mm² shielded (red)</p>	Thermal sensor Klixer bi-metal switch 150°C	
	10	4		Ⓐ	
				<p>Ⓑ</p>	
<p>All rights reserved; particularly the right of reproduction and translation. No part of this publication may be reproduced in any form (including photocopy, microfilm or any other means), or distributed or processed by an electronic system without the written consent of Erich Stallkamp ESTA GmbH.</p>					
		<p>Program number</p>		<p>Scale</p>	
		<p>Order number</p>		<p>Material</p>	
		<p>Date</p>		<p>Name</p>	
		<p>Mod.</p>		<p>Name</p>	
		<p>Contr.</p>		<p>Connection plan for TMR Type 3</p>	
		<p>Standard</p>		<p>TMP / TMHP Type 3 4-22kW</p>	
		<p>Stallkamp</p>		<p>Group</p>	
		<p>Erich Stallkamp ESTA GmbH</p>		<p>Type</p>	
		<p>Postfach 1260 49408 Dinklage</p>		<p>Dr. no.</p>	
		<p>Tel. 04443/9666-0 Fax -60</p>		<p>Index</p>	
		<p>IT no. 25-0106.dwg</p>		<p>Sheet</p>	
				<p>Sh.</p>	

11 ELECTRICAL CONNECTION OF TMP TYPE 3 M1801

11.1 Electrical connection and protection of the electrical motor

The electrical connection may only be carried out by a certified electrician. The VDE regulations (German Association for Electrical, Electronic & Information Technologies) must be observed. Compare the existing voltage with the specifications on the motor's manufacturer's plate and select the appropriate circuit.

The device is watertight according to IP68. The manual switch box is splash-proof according to IP40. The plastic housing of the automatic delta-wye start-up is splash-proof according to IP65.

The technical connection conditions of the local energy authorities must be observed during connection.

The use of a motor protection device is a prerequisite.

The device must be properly connected to the mains supply (pay attention to serviceable protective conductors) and check whether the feed cable is properly protected. The respective power consumption of the motor in amperes is shown on the motor's type plate. See Point "**7. Performance data and dimensions**" for TMP"

ATTENTION!

The switch box must be protected from moisture at all times!

11.2 Direction test

The impeller turns clockwise when viewed from the pump inlet (from below).

The direction can be tested by turning the device on and off again rapidly.



If the direction is incorrect, swap any two of the phases L1, L2 and L3 of the mains supply lines in the switch box!

The electrical installation may only be carried out by a certified electrician.

(in accordance with the VDE regulation or national regulations)

IMPORTANT!!

The electric cable must **never** be subjected to tensile loads, as this can cause damage to the unit or cause it to leak.

Ensure that the electric cable is always taut and does not droop during operation.

When winching up the device, the electric cable must also be pulled up as it could otherwise be damaged.

12 MAINTENANCE OF TMP TYPE 3 M1801

The specified maintenance and inspection work must be performed regularly. These tasks may only be carried out by trained, qualified and authorised personnel. The operator of the device is obligated to have the manufacturer himself or a service approved by the manufacturer perform maintenance work according to the regulations of the manufacturer, including the necessary changing of oil and the repair and replacement of wearing parts. The operator is thus obligated to maintain a maintenance and revision list, which facilitates monitoring of the mandatory inspection and maintenance work (see Point 16 Maintenance and revision list).

12.1 Maintenance intervals

The device must be inspected for damage before every commissioning. In particular the pump impeller and the cable must be proven to be free of damage. In addition, the secure positioning of all screws and other fixing devices must be verified.

12.1.1 Recommendation: every 3 months

12.1.1.1 Check the power consumption at the amperemeter

Power consumption is constant during normal operation. Occasional current fluctuations are caused by the consistency of the medium being pumped/agitated. If a constantly increased power consumption is measured, a smaller impeller is required (see Point 8.5. Pump impeller) or contact our sales representative.

12.1.2 Recommendation: every 6 months in continuous operation

12.1.2.1 Check the shaft seal

The shaft seal is a wearing part and must be replaced at the latest every 4,500 operating hours when the device is in continuous operation. The shaft seal is available as a complete sub-assembly. Please contact our sales representative.

12.1.3 Recommendation: every 6 months

12.1.3.1 Check the insulation resistance

Every 4,500 operating hours or at least once annually, we recommend measuring the insulation resistance of the motor winding in the scope of maintenance work. If the insulation resistance is not attained, moisture can enter the motor. The device must not be recommissioned. Please contact our sales representative.

12.1.3.2 Check the functioning of the monitoring devices

Every 4,500 operating hours or at least once annually we recommend checking the monitoring devices in the scope of maintenance work. For these functional checks, the device must be cooled down to ambient temperature. The electrical power cords of the monitoring devices must be disconnected in the switch box. The temperature protection should be checked with a continuity measurement. If a leakage detection is installed, it should be tested with an ohmmeter. If you identify any defects, please contact our sales representative.

12.1.4 Recommendation: every 12 months

12.1.4.1 Check the oil filling in the oil chamber

The oil filling in the oil chamber must be checked once annually. If oil is missing or contaminated with water or other media, the device must be taken out of operation immediately. In this case, the oil must be changed immediately and the front shaft seals must be exchanged. (See point "**12.2 Replacing the shaft seal on the TMP Type 3 M1801 BG 132/160**")

12.1.4.2 Checking the tightening torque of all screw connections

Every 9,000 operating hours or at least once annually, we recommend checking the secure positioning of the screw connections in the scope of maintenance work. The tightening torques for stainless steel screws in Nm for different thread sizes are shown below:

(M8 = 18 Nm, M10 = 33 Nm, M12 = 57 Nm, M16 = 135 Nm, M20 = 150 Nm)

12.1.4.3 Visual inspection and cleaning of the connection cable and lifting gears

Every 9,000 operating hours or at least once annually we recommend checking the connection cable, shackles and lifting gear for damage and soiling in the scope of maintenance work. Deposits, blockages and adhering fibrous materials must be removed. In addition, the insulation on the connection cable must be inspected for damage, such as scratches, tears, blistering or crushed areas. Damaged components must be exchanged immediately. Please contact our sales representative.

12.2 Replacing the shaft seal on the TMP Type 3 M1801 BG 132/160

The following installation instructions refer to drg. no.: 28-0200 and 28-0300

Before carrying out installation work on the pump, the power supply or voltage in the feed cable to the submersible motor pump's switch box must be disconnected.

Raise the pump out of the pit and clean it.

Disassembly:

1. Remove brass plug ½" no. 26 and copper filling ring ½" no. 27 (release oil).
2. Pull off protection cap no. 130 and untighten nut no. 129 (we recommend inserting a piece of wood between the impeller and the lid of the feeder in order to block the impeller when untightening the nut).
3. Disassemble the lid of the pump feeder no. 131.
4. Pull the impeller no. 127 off downwards.
5. Remove the feather key no. 123.
6. Remove compensating washers no. 124, 125 or 126, if present.
7. Remove spacer disk no. 19 and O-ring no. 22.
8. Untighten and remove packing sleeve no. 18 using a hook spanner.
9. Remove sleeve for motor shaft no. 23.

Installation:

1. Glue packing sleeve no. 18 including shaft seal rings at thread using Curil and assemble.
2. Carefully slide in sleeve for motor shaft no. 23 and O-ring no. 22.
3. Slide on the spacer disk no. 19.
4. Slide compensating washers no. 124, 125 or 126 back in, if present.
5. Insert the feather key no. 123.
6. Slide on the impeller no. 127.
7. Assemble the lid of the pump feeder no. 131.
8. Check that the gap between the impeller no. 127 and the lid of the pump feeder no. 131 is 1-2 mm; if necessary, additionally mount or remove the distancers no. 124, 125 or 126 as of point 3.
9. Slide on the disk no. 128.
11. Screw on a new lock nut no. 129.
12. Put on protective cap no. 130.
13. Fill in oil (Wibohyd EHF 46), BG 132 = 0.27 l; BG 160 = 0.3 l.
14. Mount new brass plug ½" no. 26 and new copper filling ring ½" no. 27.
15. Carry out functional test.

12.3 Changing the pump impeller on TMP Type 3 M1801

If power consumption is too high when operating the pump, a smaller impeller must be installed.

Disassembly: see 12.2: Disassembly, Point 2 to 4

Installation: see 12.2: Installation, Point 6 to 12

Then perform a functional test!

13 NOTICES

13.1 Regulation of the professional association

The following accident prevention regulations of the Agricultural Professional Association can be found in Paragraph 2.8 under "Special provisions for pits and canals":

Paragraph 2.8

§ 1 Protection against falling in

- (1) Pits, ditches, canals, wells and other similar pits in the house and courtyard area must be protected with fences or coverings to prevent persons from falling in. If these are not deeper than 100 cm, other safety precautions suffice.

§ 2 Openings

- (1) If removal and entry openings, etc., are opened, it must be guaranteed that persons and objects cannot fall in.
- (2) Pits and canals that are customarily entered must have facilities which permit risk-free entry. The openings of these pits and canals must be dimensioned in such a way to allow the rescue of any accident victims.

§ 3 Entry

- (1) Before entry and during the presence in pits and canals, ensure that sufficient respiratory air is present and that plant facilities are reliably protected against being switched on. The handling of naked flames is not permitted.
- (2) Entry for the recovery of an accident victim is only permissible if two other persons secure the entering person with a rope which is firmly anchored outside the tank.

§ 4 Tanks and canals for animal faeces

- (1) For tanks and canals in the open air, it must be guaranteed by suitable measures that fermentation gas cannot flow into the buildings.
- (2) Closed tanks in the open air must have vent openings on opposite-lying sides.
- (3) If tanks and canals are found in the buildings – also under slatted floors – it must be guaranteed that fermentation gases are conducted away from the buildings.
- (4) If tanks and canals in the buildings are furnished with agitators, pumping and rinsing plants, facilities for the removal of fermentation gases must be present which automatically switch on when the agitators, pumping and rinsing plants are taken into operation. They may only be switched off after conclusion of the work process. The gases conducted away must not endanger persons.
- (5) Canals must be designed so as to avoid any unnecessary whirling up of the faeces.
- (6) Operating stations for agitating, pumping and rinsing equipment etc. must be built up over the floor.
- (7) Closed rooms in which there are operating stations may not have openings to the tanks and canals.
- (8) Operation instructions must be permanently attached to the operating stands.

§ 5 Removal of animal faeces from tanks and canals

- (1) No smoking and no naked flames are allowed in the immediate proximity of removal openings during the agitating and removal of faeces.
- (2) In the buildings in which there are open tanks and canals, the presence of persons and animals during agitation and removal is only permissible with sufficient ventilation.

§ 6 Warning signs


- (1) Easily visible warning signs must be attached to openings of tanks and canals which indicate the danger of gases.
- (2) Refer to the "Information Sheet with Notice, Warning, Mandatory, Prohibition and Rescue Signs" of the Federal Association of Agricultural Professional Associations.

14 SPARE PARTS LIST FOR TMP TYPE 3 M1801 BG 132



Stallkamp devices may only be repaired by specialists that have been trained by the manufacturer of this device (Erich Stallkamp ESTA-GmbH). To access our spare parts price lists, please contact your sales representative.

14.1 Assembly drawing, TMP Type 3 M1801 BG 132, Drg.28-0300

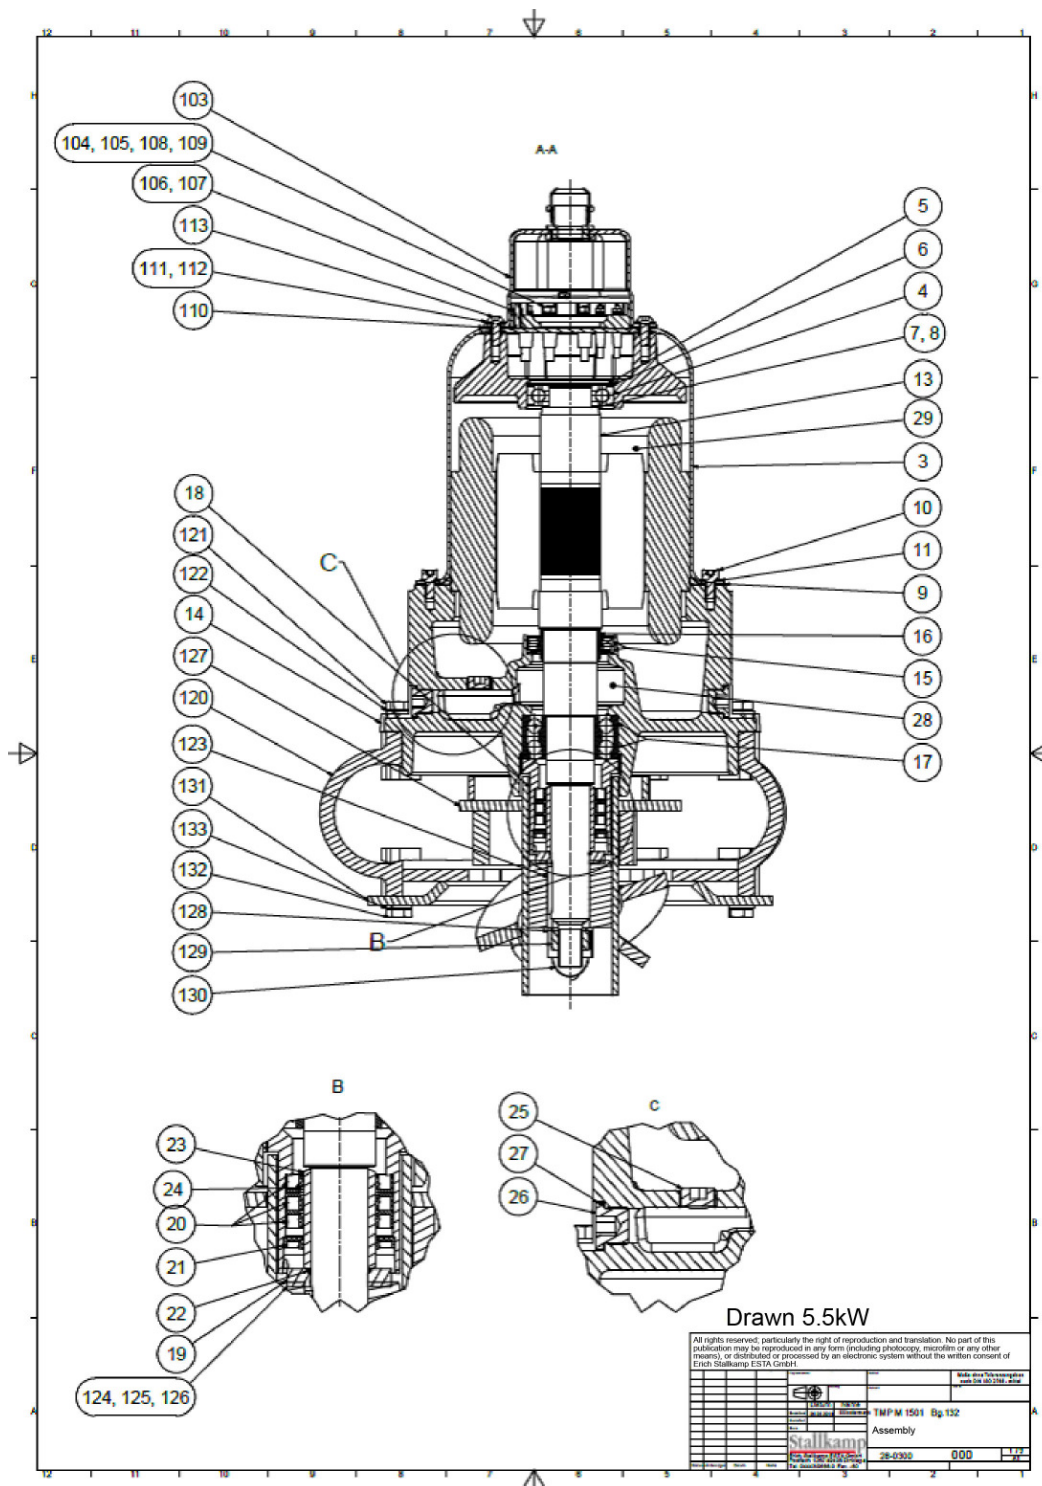


15 SPARE PARTS LIST FOR TMP TYPE 3 M1801 BG 160



Stallkamp devices may only be repaired by specialists that have been trained by the manufacturer of this device (Erich Stallkamp ESTA-GmbH). To access our spare parts price lists, please contact your sales representative.

15.1 Assembly drawing, TMP Type 3 M1801 BG 160, Drg.28-0200

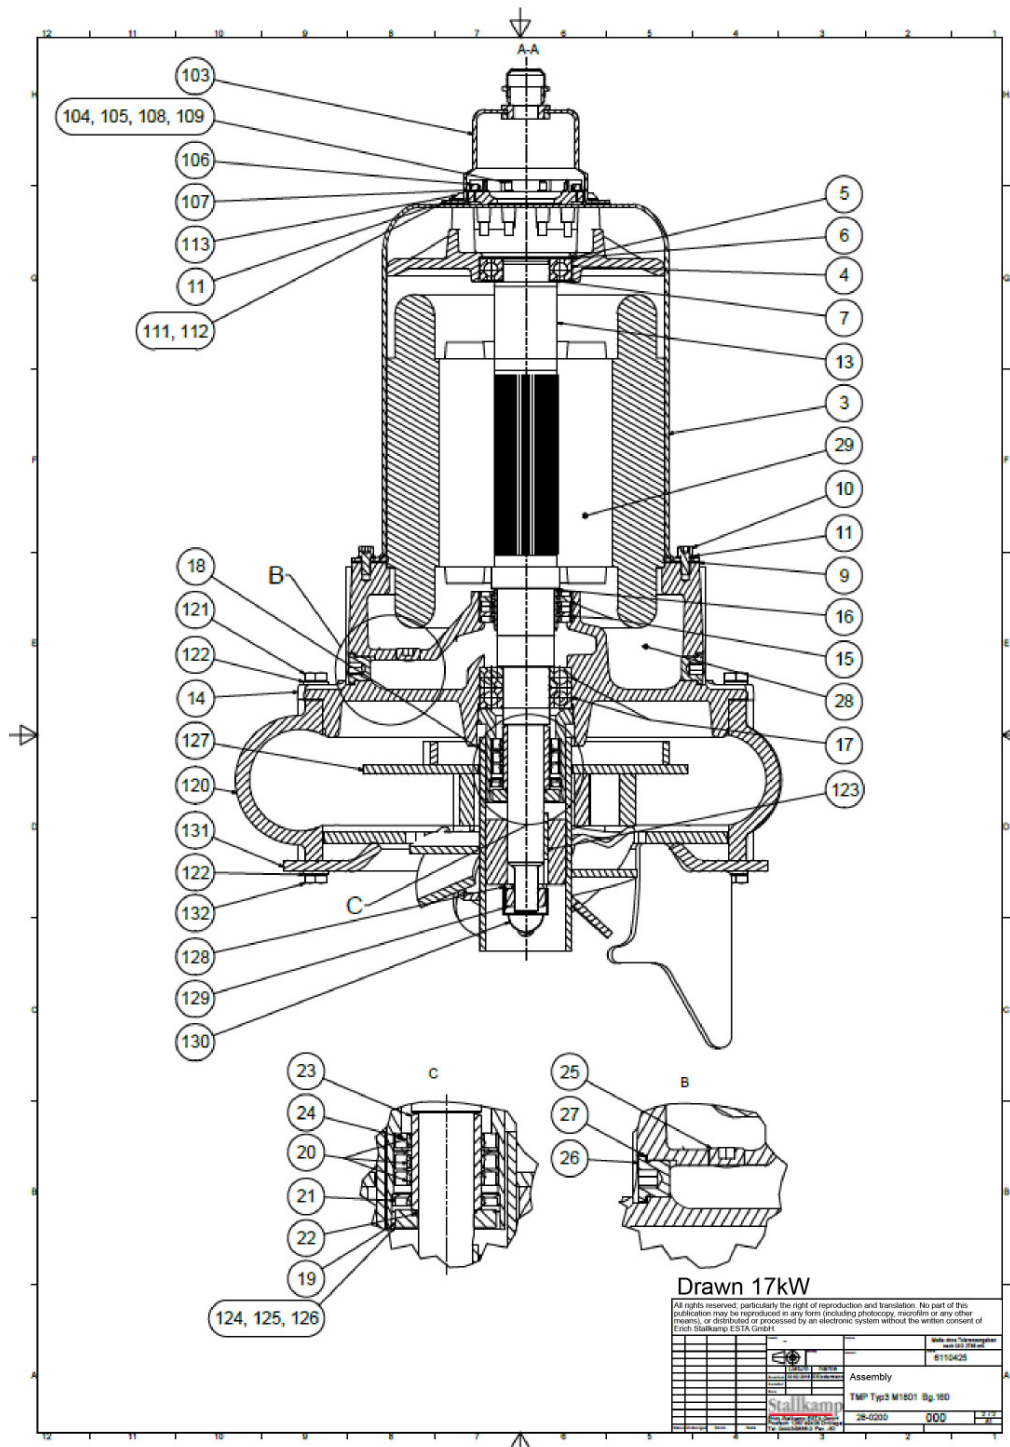

16 MAINTENANCE AND REVISION LIST

Each person must properly enter all maintenance and revision work in the list and confirm it with his or her own signature and that of the person responsible.

This list must be submitted to the supervisory bodies of the professional association, the TÜV and the manufacturer on request.

[illegible]

[illegible]

You can find us here



Stallkamp

...Lead by innovative technology

Dinklage lies in the heart of the Oldenburg Münsterland.

From the exit (A1) Lohne Dinklage No. 65, direction Dinklage, towards Dinklage Vechta, then industrial area West.

- Pump technology
- Agitating technology
- Stainless steel tanks



Erich Stallkamp ESTA GmbH

In der Bahler Heide 4 – Industriegebiet West – 49413 Dinklage, Germany

Tel. +49 (0) 44 43 / 96 66-0 – Fax +49 (0) 44 43 / 96 66-60

info@stallkamp.de – <http://www.stallkamp.de>

Stallkamp – the competent solution for every application